



ELECTRORED

Bolivia S.R.L.

ISOLET

One step ahead!



AISLADOR DE RESINA EPOXI 16X25mm. 1/4"


Modelo AIPP 01



Umax. (kV)	0,75
Ens. Dielec. (kV)	7
Masa (kg)	0,015
Temp. Trab. (°C)	hasta +75°C
Color	Naranja RAL 2003
Flexion (N)	(M6) > 770 (P0)
Codigo	1876

Insertos	D1	C1 (mm)	T1 (N.m)	D2	C2 (mm)	T2 (N.m)
	M6	6	3,9	M6	6	3,9
	1/4"	6	3,9	1/4"	6	3,9

Dimensiones (mm)

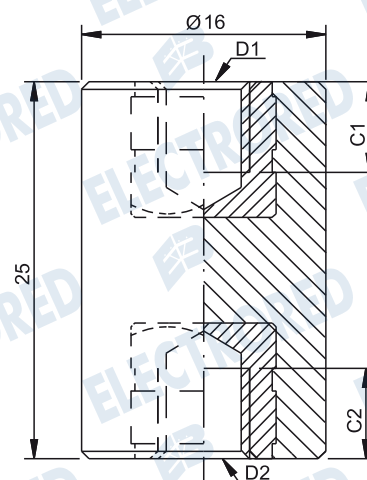

AISLADOR DE RESINA EPOXI 16X30mm. 1/4"


Modelo AIPP 01/1



Umax. (kV)	0,75
Ens. Dielec. (kV)	10
Masa (kg)	0,017
Temp. Trab. (°C)	hasta +75°C
Color	Naranja RAL 2003
Flexion (N)	(M6) > 1070 (P0)
Codigo	1877

Insertos	D1	C1 (mm)	T1 (N.m)	D2	C2 (mm)	T2 (N.m)
	M6	6	3,9	M6	6	3,9
	1/4"	6	3,9	1/4"	6	3,9

Dimensiones (mm)

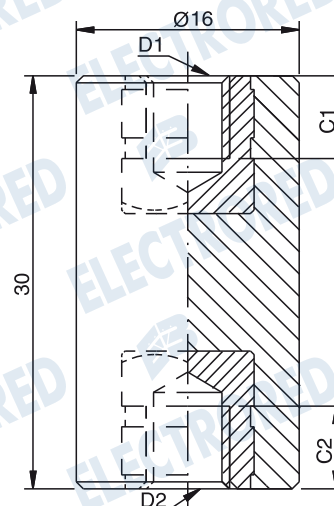

Pag. 1



LA PAZ:

Av. I. de las Muñecas N° 494
entre Pando y Viacha
Central Piloto: (591-2) 2462046
electroredlp@electrored.com.bo

SANTA CRUZ:

Av. Sta. Cruz N° 262
entre Charcas y Puerto Suarez
Central Piloto: (591-3) 3368888
electroredsc@electrored.com.bo

COCHABAMBA:

C. Tumusla N° 36
entre Heroínas y Colombia
Central Piloto: (591-4) 4583221
electroredcoba@electrored.com.bo

EL ALTO:

Calle 1 N° 3760 entre Av. 6 de Marzo
y Evadidos del Paraguay
Central Piloto: (591-2) 2821322
electroreda@electrored.com.bo

www.electrored.com.bo

AISLADOR DE RESINA EPOXI 25X30mm. 1/4"

Modelo AIPP 02




Umax.	(kV)	0,75
Ens. Dielec.	(kV)	10
Masa	(kg)	0,028
Temp. Trab.	(°C)	hasta +75°C
Color		Naranja RAL 2003
Flexion	(N)	(M6) > 3840 (Po)
Codigo		1878

Insertos

D1	C1 (mm)	T1 (N.m)	D2	C2 (mm)	T2 (N.m)
M6	6	7,8	M6	6	7,8
1/4"	6	7,8	1/4"	6	7,8
M8	8	27	M8	8	27

Dimensiones (mm)

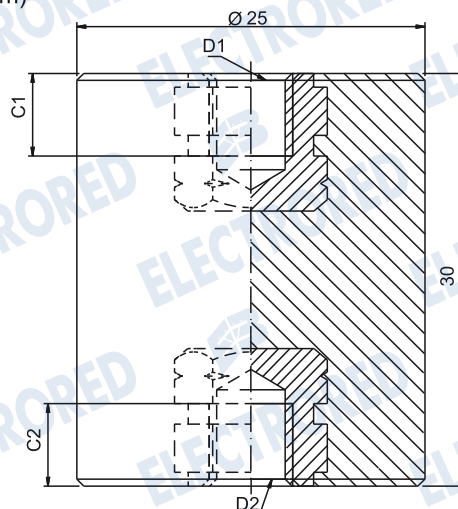

AISLADOR DE RESINA EPOXI 30X20mm. 1/4"

Modelo AIPP 03




Umax.	(kV)	0,50
Ens. Dielec.	(kV)	5,2
Masa	(kg)	0,033
Temp. Trab.	(°C)	hasta +75°C
Color		Naranja RAL 2003
Flexion	(N)	(M6) > 2030 (Po)
Codigo		1879

Insertos

D1	C1 (mm)	T1 (N.m)	D2	C2 (mm)	T2 (N.m)
M6	6	7,8	M6	6	7,8
1/4"	6	7,8	1/4"	6	7,8

Dimensiones (mm)

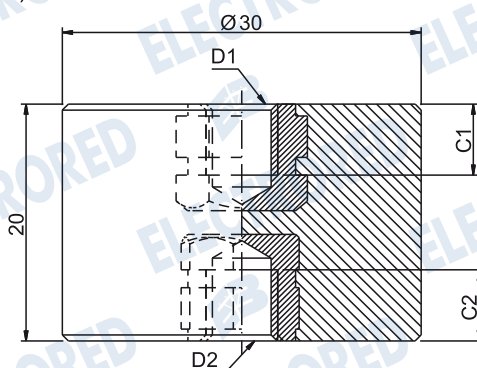

AISLADOR DE RESINA EPOXI 30X30mm. 1/4"

Modelo AIPP 04




Umax.	(kV)	0,75
Ens. Dielec.	(kV)	10
Masa	(kg)	0,045
Temp. Trab.	(°C)	hasta +75°C
Color		Naranja RAL 2003
Flexion	(N)	(M8) > 3560 (Po)
Codigo		1880

Insertos

D1	C1 (mm)	T1 (N.m)	D2	C2 (mm)	T2 (N.m)
M6	6	7,8	M6	6	7,8
1/4"	6	7,8	1/4"	6	7,8
M8	8	27	M8	8	27
3/8"	10	31	3/8"	10	31
M10	10	31	M10	10	31

Dimensiones (mm)

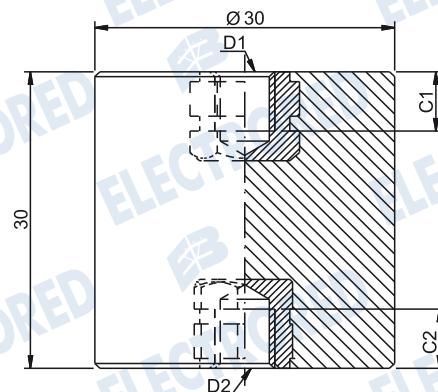

AISLADOR DE RESINA EPOXI 30X40mm. 1/4"

Modelo AIPP 05




Umax.	(kV)	1,00
Ens. Dielec.	(kV)	10
Masa	(kg)	0,060
Temp. Trab.	(°C)	hasta +75°C
Color		Naranja RAL 2003
Flexion	(N)	(M8) > 4170 (Po)
Codigo		1881

Insertos

D1	C1 (mm)	T1 (N.m)	D2	C2 (mm)	T2 (N.m)
M6	6	7,8	M6	6	7,8
1/4"	6	7,8	1/4"	6	7,8
M8	8	27	M8	8	27
3/8"	10	31	3/8"	10	31
M10	10	31	M10	10	31

Dimensiones (mm)

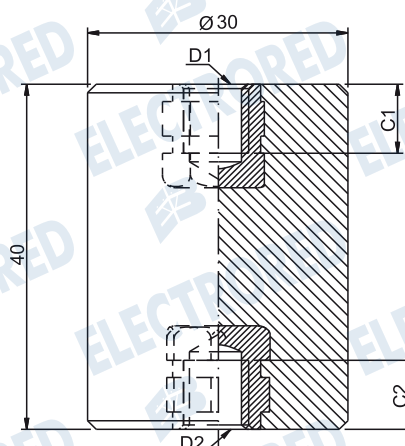

AISLADOR DE RESINA EPOXI 30X50mm. 1/4"

Modelo AIPP 06




Umax. (kV)	1,50
Ens. Dielec. (kV)	20
Masa (kg)	0,077
Temp. Trab. (°C)	hasta +75°C
Color	Naranja RAL 2003
Flexion (N)	(M8) > 3400 (P0)
Codigo	1882

Insertos

D1	C1 (mm)	T1 (N.m)	D2	C2 (mm)	T2 (N.m)
M6	6	7,8	M6	6	7,8
1/4"	6	7,8	1/4"	6	7,8
M8	8	27	M8	8	27
3/8"	10	31	3/8"	10	31
M10	10	31	M10	10	31

Dimensiones (mm)

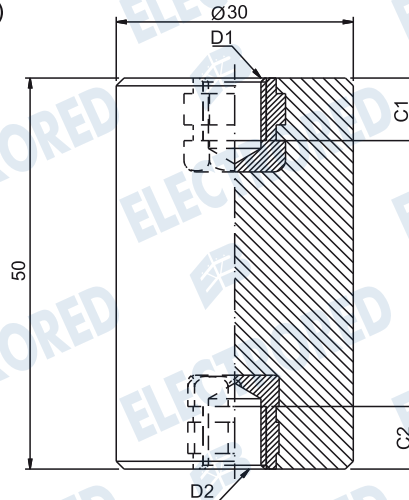

AISLADOR DE RESINA EPOXI 30X50mm. 3/8"

Modelo AIPP 06




Umax. (kV)	1,50
Ens. Dielec. (kV)	20
Masa (kg)	0,077
Temp. Trab. (°C)	hasta +75°C
Color	Naranja RAL 2003
Flexion (N)	(M8) > 3400 (P0)
Codigo	1883

Insertos

D1	C1 (mm)	T1 (N.m)	D2	C2 (mm)	T2 (N.m)
M6	6	7,8	M6	6	7,8
1/4"	6	7,8	1/4"	6	7,8
M8	8	27	M8	8	27
3/8"	10	31	3/8"	10	31
M10	10	31	M10	10	31

Dimensiones (mm)

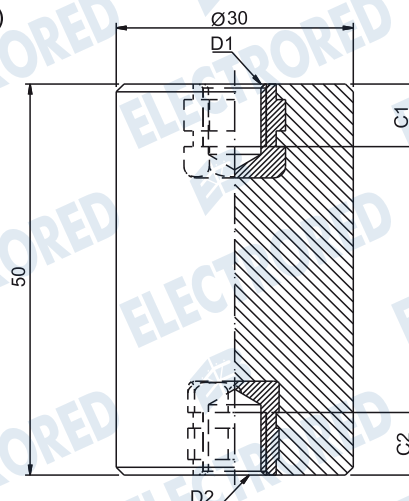

AISLADOR DE RESINA EPOXI 40X40mm. 3/8"

Modelo AIPP 09




Umax. (kV)	1,00
Ens. Dielec. (kV)	10
Masa (kg)	0,105
Temp. Trab. (°C)	hasta +75°C
Color	Naranja RAL 2003
Flexion (N)	(M8) > 7140 (Po)
Codigo	1884

Insertos

D1	C1 (mm)	T1 (N.m)	D2	C2 (mm)	T2 (N.m)
M6	6	7,8	M6	6	7,8
1/4"	6	7,8	1/4"	6	7,8
M8	8	27	M8	8	27
3/8"	10	31	3/8"	10	31
M10	10	31	M10	10	31

Dimensiones (mm)

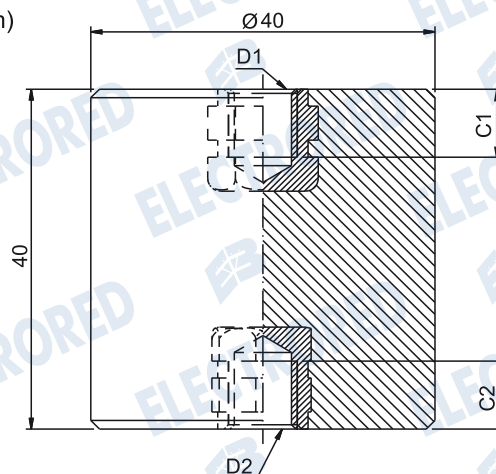

AISLADOR DE RESINA EPOXI 50X50mm. 3/8"

Modelo AIPP 11




Umax. (kV)	1,50
Ens. Dielec. (kV)	20
Masa (kg)	0,195
Temp. Trab. (°C)	hasta +75°C
Color	Naranja RAL 2003
Flexion (N)	(M8) > 6900 (Po)
Codigo	1885

Insertos

D1	C1 (mm)	T1 (N.m)	D2	C2 (mm)	T2 (N.m)
M6	6	7,8	M6	6	7,8
1/4"	6	7,8	1/4"	6	7,8
M8	8	27	M8	8	27
3/8"	10	31	3/8"	10	31
M10	10	31	M10	10	31

Dimensiones (mm)

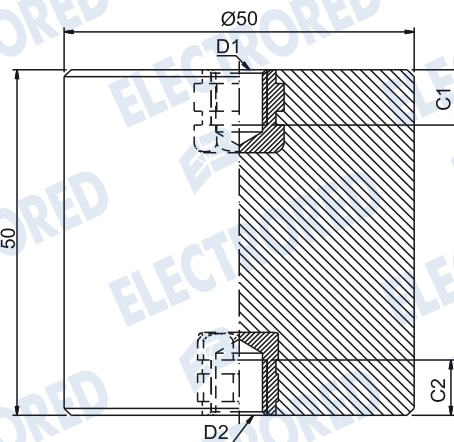

AISLADOR DE RESINA EPOXI 50X70mm. 3/8"

Modelo AIPP 11/2




Umax.	(kV)	1,50
Ens. Dielec.	(kV)	20
Masa	(kg)	0,270
Temp. Trab.	(°C)	hasta +75°C
Color		Naranja RAL 2003
Flexion	(N)	(M10) > 4940 (Po)
Codigo		1886

Insertos

D1	C1 (mm)	T1 (N.m)	D2	C2 (mm)	T2 (N.m)
M8	8	27	M8	8	27
3/8"	10	31	3/8"	10	31
M10	10	31	M10	10	31

Dimensiones (mm)

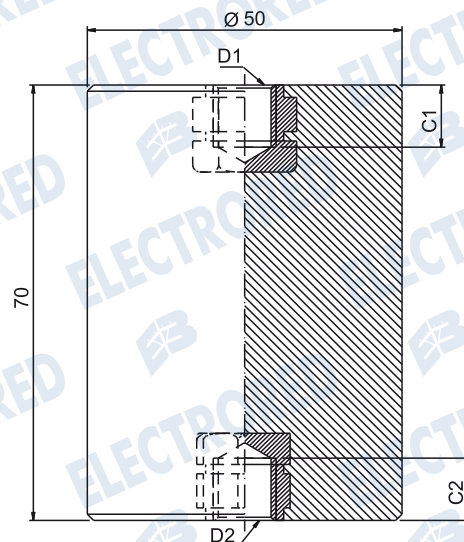

AISLADOR DE RESINA EPOXI 16X35mm. 1/4"

Modelo AIPP 01/2



Umax.	(kV)	0,75
Ens. Dielec.	(kV)	10
Masa	(kg)	0,020
Temp. Trab.	(°C)	hasta +75°C
Color		Naranja RAL 2003
Flexion	(N)	(M6) > 830 (Po)
Codigo		6191

Insertos

D1	C1 (mm)	T1 (N.m)	D2	C2 (mm)	T2 (N.m)
M6	6	3,9	M6	6	3,9
1/4"	6	3,9	1/4"	6	3,9

Dimensiones (mm)

